

## **Closure Completion Notification for Closure by Removal**

February 20, 2025

Closure Completion Notification

Mountaineer Plant

Bottom Ash Pond Complex

On February 20, 2025, the Mountaineer Power Plant's Bottom Ash Pond Complex transitioned to closed status in accordance with 40 CFR 257.102(c)(2). This notice of completion of closure is being placed in the operating record in accordance with 40 CFR 257.102(h).

Effective with the Closure Completion Notification, the former ash storage site is no longer a CCR unit. The following relevant operating record documents are no longer required going forward:

- Hazard Potential Classification
- Emergency Action Plan
- Face to Face Meeting Documentation for EAP
- History of Construction and Revisions for Surface Impoundments
- Structural Stability Assessments
- Safety Factor Assessments
- Fugitive Dust Plan
- Run on and Run off Plan
- Inflow Design Flood System Control Plan

**CLOSURE CERTIFICATION BY QUALIFIED PROFESSIONAL ENGINEER**

I certify that the Mountaineer Bottom Ash Pond Complex has been closed in accordance with the most recent written closure plan specified by paragraphs §257.102(c)(2)(iv) and the requirements of section §257.102.

David Anthony Miller

Printed Name of Licensed Professional Engineer

*David Anthony Miller*

Signature



22663

License Number

West Virginia

Licensing State

02.20.2025

Date

### VERDANTAS CERTIFICATION

Based on the construction observations performed by Verdantas representatives and confirmation laboratory analyses conducted, I hereby certify that the Bottom Ash Pond East Basin at the Mountaineer Plant in New Haven, West Virginia, as shown on the record drawing located in Appendix D, has achieved removal of all CCR material and soil with constituent concentrations above relevant background standards (i.e. closed by removal) in substantial compliance with the Mountaineer BAP Written Closure Plan (November 30, 2020), Construction Quality Assurance Plan for Pond Closure and Repurposing, Construction Drawings for the CCR/ELG closure by removal project, Bottom Ash Pond Closure and Repurposing Contract as provided by Worley (December 3, 2021), as per 40 CFR 257.102(c), and as clarified herein. The groundwater monitoring and compliance aspect of CCR Unit closure by removal criteria, as required by 40 CFR 257.102(c), will be certified under a separate report. The Contractor (R.B. Jergens) obtained the survey data used to develop the record drawing. R.B. Jergens verified that the elevations met the closure requirements, and Verdantas also reviewed the survey data.



Trent S. Hathaway, PE  
Quality Assurance Officer/CQA Manager



Daniel P. Duffy, PE  
Certifying Engineer  
25332




12/6/2022

### VERDANTAS CERTIFICATION

Based on the construction observations performed by Verdantas representatives and confirmation laboratory analyses conducted, I hereby certify that the Bottom Ash Pond West Basin at the Mountaineer Plant in New Haven, West Virginia, as shown on the record drawing located in Appendix D, has achieved removal of all CCR material and at least an additional one foot of underlying non-CCR material. Soil testing of the underlying non-CCR soil validate that the residual soil concentrations are below relevant de minimis remedial standards presented in the West Virginia Department of Environmental Protection's Voluntary Remediation and Redevelopment Rule (60CSR9, effective 12/2/2021) (i.e. closed by removal) in substantial compliance with the Mountaineer Bottom Ash Pond Written Closure Plan (August 31, 2023), Construction Quality Assurance Plan for Pond Closure and Repurposing, Construction Drawings for the CCR/ELG closure by removal project, Bottom Ash Pond Closure and Repurposing Contract as provided by Worley (December 3, 2021), as per 40 CFR 257.102(c), and as clarified herein. The groundwater monitoring and compliance aspect of CCR Unit closure by removal criteria, as required by 40 CFR 257.102(c), will be certified under a separate report. The Contractor (R.B. Jergens) obtained the survey data used to develop the record drawing. R.B. Jergens verified that the elevations met the closure requirements, and Verdantas also reviewed the survey data and relies upon R.B. Jergens' verification for the data's validity.



Trent S. Hathaway, PE  
Quality Assurance Officer/CQA Manager



Daniel P. Duffy, PE  
Certifying Engineer  
25332



1/3/2024

# INFLOW DESIGN FLOOD CONTROL PLAN PERIODIC 5-YEAR REVIEW

**CFR 257.82**

Bottom Ash Complex

Mountaineer Plant  
New Haven, West Virginia

October, 2021

Prepared for: Appalachian Power Company

Prepared by: American Electric Power Service Corporation

1 Riverside Plaza

Columbus, OH 43215




DOCUMENT ID: GERS-21-051

INFLOW DESIGN FLOOD CONTROL PLAN  
PERIODIC 5-YEAR REVIEW  
CFR 257.82  
MOUNTAINEER PLANT  
BOTTOM ASH COMPLEX

PREPARED BY Brett A. Dreger DATE 10/4/2021  
Brett A. Dreger, P.E.

REVIEWED BY [Signature] DATE 10-04-2021  
Shah Baig, P.E.

APPROVED BY Gary F. Zych DATE 10/6/2021  
Gary F. Zych, P.E.  
Section Manager – AEP Geotechnical Engineering

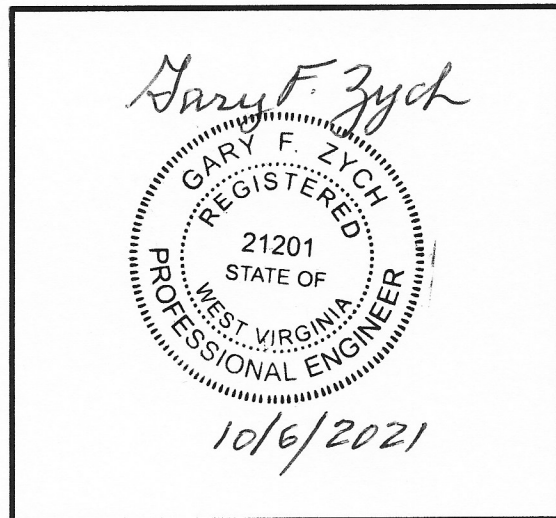

I certify to the best of my knowledge, information, and belief that the information contained in this inflow design flood control plan meets the requirements of 40 CFR § 257.82

## Table of CONTENTS

|   |   |
|---|---|
| <b>1.0 OBJECTIVE</b> .....                        | 4 |
| <b>2.0 DESCRIPTION OF THE CCR UNIT</b> .....      | 4 |
| <b>3.0 INFLOW DESIGN FLOOD 257.82(a)(3)</b> ..... | 4 |
| <b>4.0 FLOOD CONTROL PLAN 257.82(c)</b> .....     | 4 |

### **Attachment A – Hydrologic and Hydraulic Analysis Report for Mountaineer Plant**

## **1.0 OBJECTIVE**

This report was prepared by AEP- Geotechnical Engineering Services (GES) section to fulfill requirements of CFR 257.82 for the hydrologic and hydraulic evaluation of CCR surface impoundments. This is the first periodic 5-year review of the inflow design flood control plan.

## **2.0 DESCRIPTION OF THE CCR UNIT**

The Mountaineer Power Plant is located near the City of New Haven, Mason County, West Virginia. It is owned and operated by Appalachian Power Company (APCo). The facility operates one surface impoundment for storing CCR called the Bottom Ash Complex.

The Bottom Ash Complex is comprised of diked embankments on the north, east, and west sides. The south side of the Bottom Ash Complex is incised. There are six main ponds within the Bottom Ash Complex as listed below. The Bottom Ash Ponds and Wastewater Ponds were designed in tandem; one Bottom Ash Pond and one Wastewater Pond are in service at a given time.

### *List of Main Ponds within the Bottom Ash Complex*

East Bottom Ash Pond  
West Bottom Ash Pond  
East Wastewater Pond  
West Wastewater Pond  
Reclaim Pond  
Clearwater Pond

## **3.0 INFLOW DESIGN FLOOD 257.82(a)(3)**

The Bottom Ash Pond Complex has been determined to be a Significant Hazard potential CCR impoundment. This classification has not changed since the initial evaluation. Based on this hazard classification, the Inflow Design flood was determined by section 257.82(a)(3) to be the 1000-year storm which for the Mountaineer Plant is 6.98 inches in 24 hours.

## **4.0 FLOOD CONTROL PLAN 257.82(c)**

The only inflows from the inflow design flood is the direct rainfall within the ponds dikes and pumped storm water from the main plant area. The design to safely pass the inflow design flood without overtopping the crest of the dam is based on the spillway system and surcharge flood storage capacity above the maximum operating level.

The analysis in Attachment A provides the description of the spillway system, flood storage capacity, inflow peak discharge and volume, peak discharge from the facility and maximum pool elevation.

Results of this analysis show that the Bottom Ash Complex has adequate hydrologic and hydraulic capacity to collect and control peak discharge resulting from the 1000-year inflow design.



There has not been any changes to spillway system, flood storage capacity or rainfall estimates that would change the results presented in Attachment A. The calculations show that the facility has the capacity to manage the inflow design flood, as well as larger flood events.

**ATTACHMENT A**  
**Hydrologic and Hydraulic Analysis Report**  
**For**  
**Mountaineer Plant**

# Hydrologic and Hydraulic Analysis Report

**Mountaineer Plant Bottom Ash Pond Complex  
New Haven, West Virginia**

September 2015

Terracon Project Number: N4155129

**Prepared for:**

American Electric Power  
1 Riverside Plaza  
Columbus, Ohio

**Prepared by:**

Terracon Consultants, Inc.  
Columbus, Ohio

[terracon.com](http://terracon.com)

**Terracon**

Environmental



Facilities



Geotechnical



Materials

September 30, 2015

American Electric Power  
1 Riverside Plaza  
Columbus, OH 43215

Attn: Mr. Brett Dreger  
P: [614] 716 2258  
E: badreger@aep.com

Re: Hydrologic and Hydraulic Analysis, and Professional Engineer Certification  
Mountaineer Plant Bottom Ash Pond Complex, New Haven, West Virginia  
Terracon Project Number: N4155129

Dear Mr. Dreger:

Terracon Consultants, Inc. is submitting the enclosed report for the Hydrologic and Hydraulic analysis and P.E. Certification for AEP Mountaineer Plant Bottom Ash Pond Complex located near New Haven, West Virginia. The report analyzes the impoundment's existing design and outlet structures for conformance with the recently mandated USEPA rule 40 CFR Part 257, Hazardous and Solid Waste Management System; Disposal of Coal Combustion Residuals from Electric Utilities (CCR rules) and provides a professional engineer certification.

If you have any questions regarding this submittal, please contact me at (614) 328-5184.

Sincerely,  
**Terracon Consultants, Inc.**



Baba M. Yahaya, P.E.  
Project Engineer



Mohammad S. Finy, P.E.  
Department Manager, Geo-Environmental Services

Enclosure



## TABLE OF CONTENTS

|  | Page |
|--|------|
| 1.0 INTRODUCTION.....  | 2    |
| 2.0 INFLOW DESIGN FLOOD CONTROL SYSTEM .....                     | 4    |
| 2.1 Hazard Potential Classification .....                        | 4    |
| 2.2 Computation Methods.....                                     | 5    |
| 2.3 Results .....  | 6    |
| 3.0 DISCHARGE FROM THE IMPOUNDMENT FACILITY.....                 | 6    |
| 4.0 INFLOW DESIGN FLOOD CONTROL SYSTEM PLAN.....                 | 6    |
| 5.0 RECORDKEEPING, NOTIFICATION, AND INTERNET REQUIREMENTS ..... | 7    |
| 6.0 REFERENCES.....  | 7    |
| 7.0 P.E. CERTIFICATION.....                                      | 8    |

## LIST OF EXHIBITS

|           |                        |
|-----------|------------------------|
| Exhibit 1 | Facility Location Maps |
| Exhibit 2 | Facility Layout        |
| Exhibit 3 | Facility Cross Section |

## LIST OF ATTACHMENTS

|              |   |
|--------------|---|
| Attachment 1 | Pumped Influent and Water Balance Information |
| Attachment 2 | Precipitation Data                            |
| Attachment 3 | PondPack Model Output                         |

## 1.0 INTRODUCTION

This report provides hydrologic and hydraulic analysis of the existing Bottom Ash Pond Complex (impoundment facility) of the Mountaineer Plant (plant) located near Mason County, West Virginia. The site location is shown on Exhibit 1. The plant uses the impoundment facility to temporarily store Coal Combustion Residuals (CCR). The impoundment facility consists of a series of ponds, and a metal cleaning tank secondary containment basin as shown on Exhibit 2. Six of the ponds including: East Bottom Ash Pond, West Bottom Ash Pond, East Wastewater Pond, West Wastewater Pond, Reclaim Water Pond, and Clearwater Pond are interconnected and receive mainly CCR and stormwater pumped from the plant to the system as its major external influent. The other source of influent is direct precipitation that falls within the perimeter of the impoundment facility during a storm event. The pond complex is isolated from any significant storm water inflow from adjacent catchment areas. The CCR is pumped into the system at the active Bottom Ash Pond and Wastewater Pond, and the effluent from the system eventually discharges through an outlet structure located in the Clearwater Pond.

The intent of this analysis is to determine whether or not the impoundment facility meets the April 17, 2015 USEPA mandated CCR rules requirements.

According to the CCR rules, CCR surface impoundments shall comply with the hydrologic and hydraulic capacity requirements specified under Section 257.82 of the rules and presented below:

### Section 257.82

- (a) The owner or operator of an existing or new CCR surface impoundment or any lateral expansion of a CCR surface impoundment must design, construct, operate, and maintain an inflow design flood control system as specified in paragraphs (a)(1) and (a)(2) of this section.
  - (1) The inflow design flood control system must adequately manage flow into the CCR unit during and following the peak discharge of the inflow design flood specified in paragraph (a)(3) of this section.
  - (2) The inflow design flood control system must adequately manage flow from the CCR unit to collect and control the peak discharge resulting from the inflow design flood specified in paragraph (a)(3) of this section.
  - (3) The inflow design flood is:
    - (i) For a high hazard potential CCR surface impoundment, as determined under section 257.73(a)(2) or section 257.74(a)(2), the probable maximum flood;
    - (ii) For a significant hazard potential CCR surface impoundment, as determined under section 257.73(a)(2) or section 257.74(a)(2), the 1,000-year flood;

- (iii) For a low hazard potential CCR surface impoundment, as determined under section 257.73(a)(2) or section 257.74(a)(2), the 100-year flood; or
  - (iv) For an incised CCR surface impoundment, the 25-year flood.
  
- (b) Discharge from the CCR unit must be handled in accordance with the surface water requirements under section 257.3-3.
  
- (c) Inflow design flood control system plan.
  - (1) Content of the plan. The owner or operator must prepare initial and periodic inflow design flood control system plans for the CCR unit according to the timeframes specified in paragraphs (c)(3) and (c)(4) of this section. These plans must document how the inflow design flood control system has been designed and constructed to meet the requirements of this section. Each plan must be supported by appropriate engineering calculations. The owner or operator of the CCR unit has completed the inflow design flood control system plan when the plan has been placed in the facility's operating record as required by section 257.105(g)(4).
  - (2) Amendment of the plan. The owner or operator of the CCR unit may amend the written inflow design flood control system plan at any time provided the revised plan is placed in the facility's operating record as required by § 257.105(g)(4). The owner or operator must amend the written inflow design flood control system plan whenever there is a change in conditions that would substantially affect the written plan in effect.
  - (3) Timeframes for preparing the initial plan.
    - (i) Existing CCR surface impoundments. The owner or operator of the CCR unit must prepare the initial inflow design flood control system plan no later than October 17, 2016.
    - (ii) New CCR surface impoundments and any lateral expansion of a CCR surface impoundment. The owner or operator must prepare the initial inflow design flood control system plan no later than the date of initial receipt of CCR in the CCR unit.
  - (4) Frequency for revising the plan. The owner or operator must prepare periodic inflow design flood control system plans required by paragraph (c)(1) of this section every five years. The date of completing the initial plan is the basis for establishing the deadline to complete the first periodic plan. The owner or operator may complete any required plan prior to the required deadline provided the owner or operator places the completed plan into the facility's operating record within a reasonable amount of time. In all cases, the deadline for completing a subsequent plan is based on the date of completing the previous plan. For purposes of this paragraph, the owner or operator has completed an inflow design flood control system plan when the plan has been placed in the facility's operating record as required by section 257.105(g)(4).

- (5) The owner or operator must obtain a certification from a qualified professional engineer stating that the initial and periodic inflow design flood control system plans meet the requirements of this section.
- (d) The owner or operator of the CCR unit must comply with the recordkeeping requirements specified in section 257.105(g), the notification requirements specified in section 257.106(g), and the internet requirements specified in section 257.107(g).

## **2.0 INFLOW DESIGN FLOOD CONTROL SYSTEM**

As mentioned in section 1.0, inflow into the impoundment facility include CCR and stormwater from various sources pumped into the facility; and direct precipitation that falls within the perimeter of the facility. Water from the Bottom Ash Ponds flow to the Wastewater Pond, which flow into the valve structure and can be discharged into the Reclaim Water Pond or the Clearwater Pond. Discharge water from the Reclaim Water Pond is either pumped back to the plant for recirculation, or flows to the Clearwater Pond and then to the Ohio River via an outfall structure. The CCR and stormwater are pumped into the facility through a series of pipes designed to handle the various required capacities. The pipes discharge into the facility through concrete vaults to handle the inflows. The Water from the Bottom Ash Ponds flows into the Wastewater Ponds through a reinforced concrete vertical drop inlet connected to a 48 inch diameter steel pipe located in the southern dikes of the Bottom Ash Ponds. The Wastewater Ponds drain either to the Reclaim Water Pond or the Clearwater Pond through a gated distribution structure. A 36 inch diameter steel pipe connects the Reclaim Pond to the Clearwater Pond. Effluent from the impoundment facility is discharged through an outlet structure located in the Clearwater Pond. The outlet structure consists of a concrete overflow channel leading to a vault/riser with a 30-inch diameter metal outflow pipe. The outflow pipe leads to a dissipation structure and another 30 inch steel pipe from the dissipation structure to an outfall at the Ohio River.

Water balance information provided by AEP indicates that influent is pumped into the facility at the rate of approximately 15 million gallons per day (MGD) (24 cfs) to the Bottom Ash Pond, 4 MGD (6 cfs) to the Wastewater pond; and 1 MGD (2cfs) to the Clearwater Pond. Information on the influent is presented in Attachment 1. The additional inflow due to direct precipitation is dependent on the hazard potential classification of the facility. For the purpose of this analysis, the facility is classified as a “significant hazard potential” facility. The hazard potential classification approach is presented in Section 2.2 of this report. The additional inflow under this significant hazard potential classification is estimated as the peak discharge during and following the 1000-year flood. The peak discharge from the 1000-year inflow design flood is estimated using Bentley’s PondPack software (see Section 2.3 of this report).

### **2.1 Hazard Potential Classification**

Hazard potential classification means the possible adverse incremental consequences that result from the release of water or stored contents due to failure of the diked CCR surface



impoundment or mis-operation of the diked CCR surface impoundment or its appurtenances. The hazardous potential classifications for CCR surface impoundment include high hazard potential, significant hazard potential, and low hazard potential.

- A High hazard potential CCR surface impoundment means a diked surface impoundment where failure or mis-operation will probably cause loss of human life.
- A significant hazard potential CCR surface impoundment means a diked surface impoundment where failure or mis-operation results in no probable loss of human life, but can cause economic loss, environmental damage, disruption of lifeline facilities, or impact other concerns.
- A Low hazard potential CCR surface impoundment means a diked surface impoundment where failure or mis-operation results in no probable loss of human life and low economic and/or environmental losses. Losses are principally limited to the surface impoundment owner's property.

The Mountaineer Plant Bottom Ash Pond Complex is bounded to the north by the Mountaineer Plant, to the south by a power substation to the west by a material processing unit and to the east by Highway 62. A breach of the dikes and loss of the impoundment may result in a release of bottom ash and wastewater into Little Broad Run and the Ohio River, which would be a moderate environmental and economic concern. Minor flooding would be expected within plant property, along the haul road and State Route 62, and onto the property of the adjacent decommissioned Sporn Plant. The facility's location, configuration, and operation are such that failure or mis-operation may result in no probable loss of human life, but can cause economic loss, environmental damage, and disruption to lifeline facilities. As a result of this assessment, the facility is classified as a significant hazard potential impoundment.

Pursuant to Section 257.73(a)(2) of the CCR rules, the hazard potential classification assessments of this facility will be performed every five years.

## **2.2 Computation Methods**

The impoundment facility was modeled and analyzed for its adequacy to collect and control the peak discharge resulting from 1000-year design storm using Bentley's PondPack software (PondPack).

PondPack is a versatile software program to model site drainage studies. The program can be used to model rainfall and runoff from watersheds to detention and retention facilities, outlet structures, and channels.

Development of the PondPack model requires catchment area, runoff curve number and time of concentration and input defining the facility's structural components, including pond, inlet, and outlet structures. Operationally, the east and west Bottom Ash/Wastewater Ponds operate in alternate sequences where the active set receives influent and the inactive set is cleaned out. For this analysis, a scenario in which water flow from the East Bottom Ash Pond to the East Wastewater Pond and to the Clearwater Pond is considered and modeled (See Exhibit 3). Each ponds surface area defines it catchment area. A precipitation depth of 7 inches corresponding to the 1000 year storm (see Attachment 1) was used. A curve number of 100 was used since the rainfall will be direct runoff. A minimum time of concentration of 5 minutes was used. The Water from the Bottom Ash Ponds flows into the Wastewater Ponds through a reinforced concrete vertical drop inlet connected to a 48 inch diameter steel pipe located in the southern dikes of the Bottom Ash Ponds. The Wastewater Ponds drain either to the Reclaim Water Pond or the Clearwater Pond through a gated distribution structure. A 36 inch diameter steel pipe connects the Reclaim Pond to the Clearwater Pond. A 30 inch diameter steel pipe leads from the Clearwater Pond to a dissipation structure, and another 30 inch steel pipe from the dissipation structure to an outfall at the Ohio River.

## 2.3 Results

The PondPack analysis, the maximum water surface elevation and freeboard resulting from the 1000-year flood are summarized in the table below:

| Pond                 | Maximum Water Elevation (ft) | Freeboard (ft) |
|----------------------|------------------------------|----------------|
| East Bottom Ash Pond | 613.3                        | 6.7            |
| East Wastewater Pond | 609.3                        | 2.7            |
| Clearwater Pond      | 603.6                        | 6.4            |

It can be concluded from the above results that the Bottom Ash Pond Complex has adequate hydrologic and hydraulic capacity to collect and control the peak discharge resulting from the 1000-year inflow design flood and therefore meets the April 17, 2015 USEPA mandated CCR rules requirements.

## 3.0 DISCHARGE FROM THE IMPOUNDMENT FACILITY

The discharge from the impoundment facility to the Ohio River is handled in accordance with the Plant's NPDES Permit. This conforms to the requirements Section 257.82 (b) of the CCR rules.

## 4.0 INFLOW DESIGN FLOOD CONTROL SYSTEM PLAN

The inflow design flood control system plan will be prepared pursuant to Section 257.82 (c) of the CCR rules. The plan will document how the inflow design flood control system has been

designed and constructed to meet the rules requirements.

## **5.0 RECORDKEEPING, NOTIFICATION, AND INTERNET REQUIREMENTS**

Pursuant to Sections 257.105(g), 257.106(g) and 257.107(g), the initial and periodic inflow design flood control system plan as required by Section 257.82(c) will be placed in the facility's operating records, as well as published on the facility's CCR rule compliance data information website. AEP will notify the Director of West Virginia Department of Environmental Protection when the information is placed in the operating record and on the website.

## **6.0 REFERENCES**


- AEP Project Number 1301 Drawing Numbers 1-3018A-7, 1-3018B-8, and 1-3018C, containing cross section and details for the Mountaineer Bottom Ash Complex.
- Report on Dam Safety Inspection, Bottom Ash Pond Complex. Prepared by Woodward-Clyde Consultants, Inc. Wayne, New. January 1985.

## 7.0 P.E. CERTIFICATION

Based on the site reconnaissance visit, hazard potential assessment, and the hydrologic and hydraulic analysis performed by Terracon personnel, I hereby certify that the significant hazard potential classification for the Mountaineer Plant Bottom Ash Pond Complex in this report was conducted in accordance with requirements of Section 257.73 of the CCR Rules and that the facility has adequate hydrologic and hydraulic capacity to collect and control the peak discharge resulting from 1000-year design storm.

Mohammad S. Finy, P.E.  
Certifying Engineer  
E-69705

## **EXHIBITS**

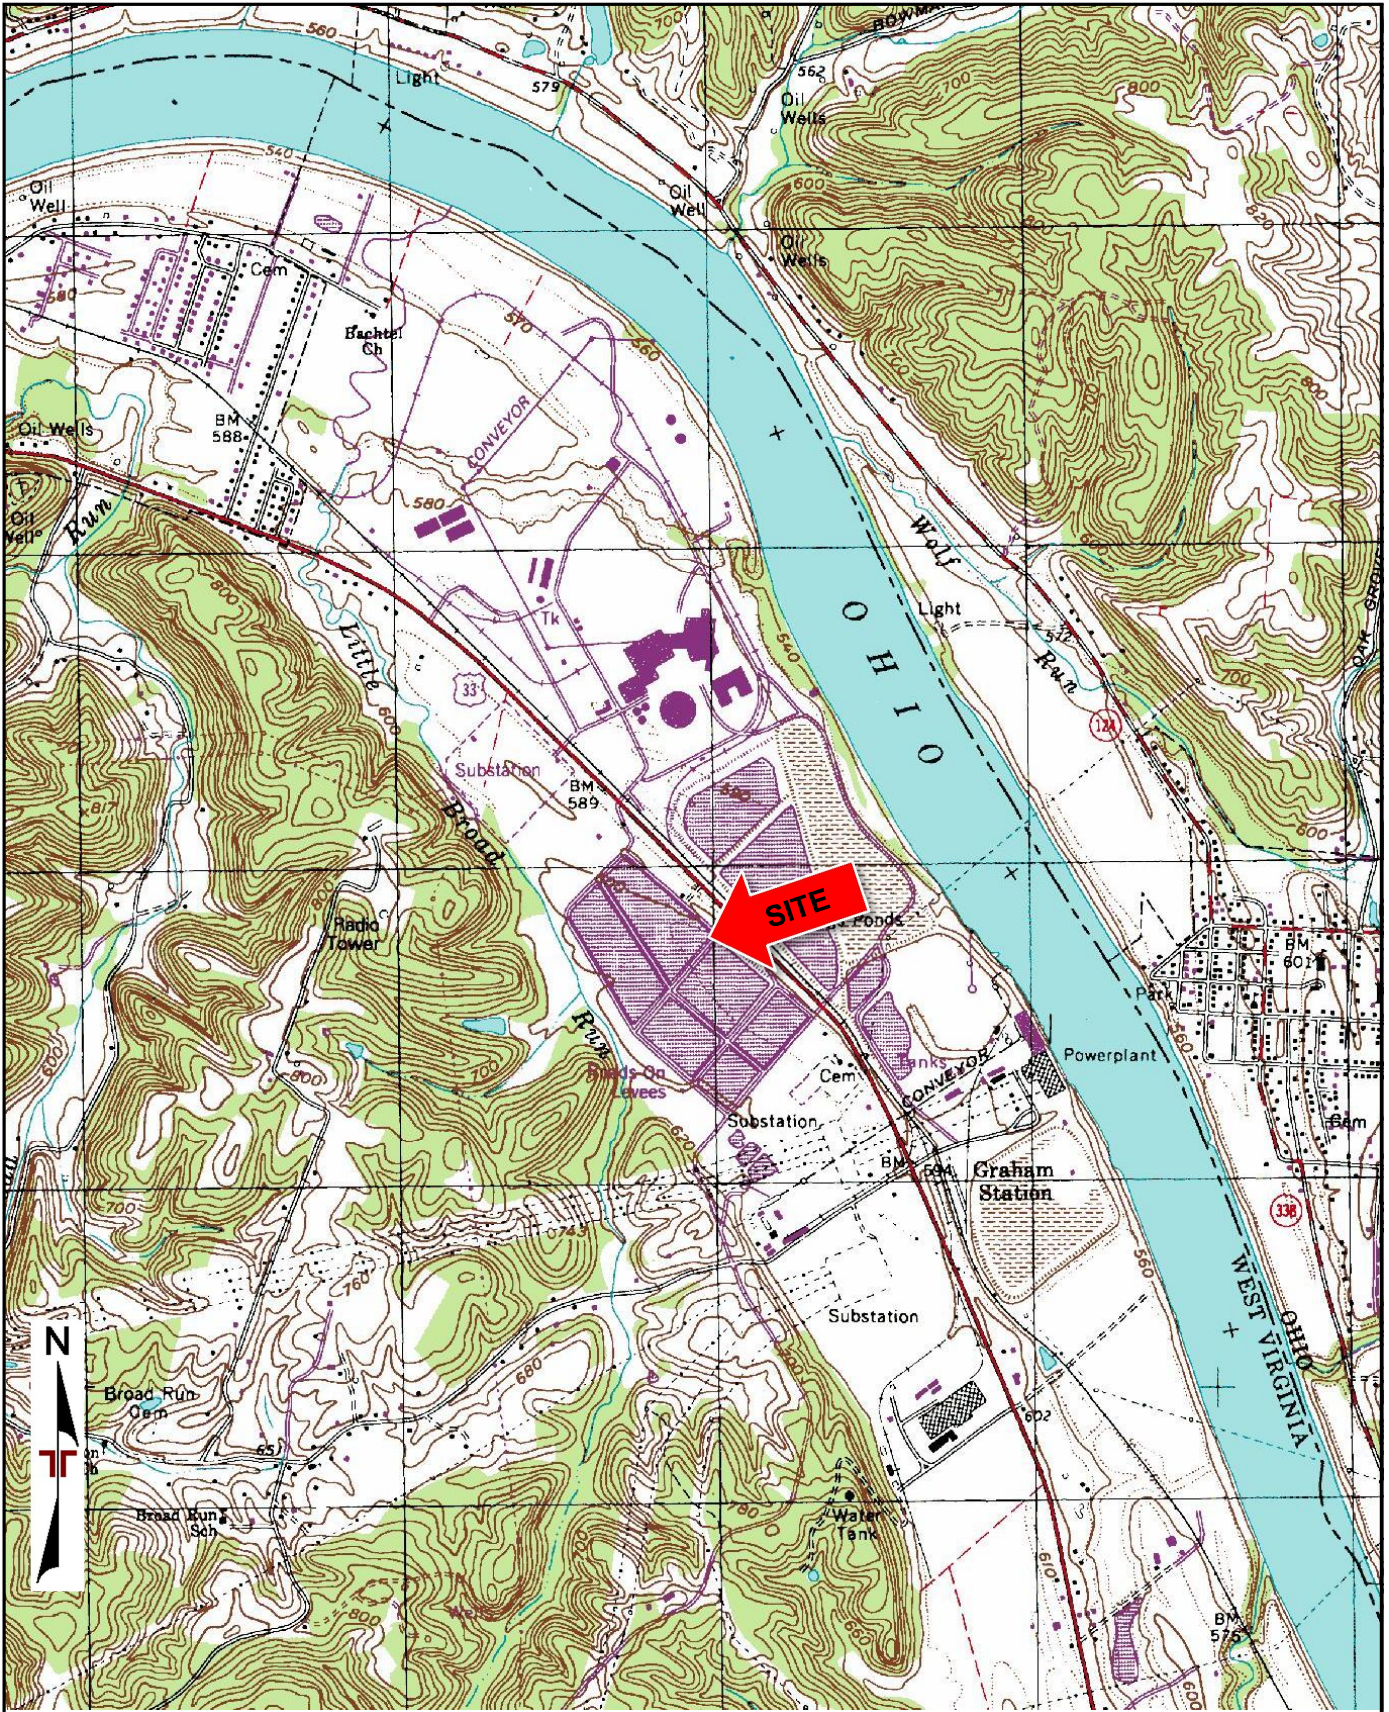

TOPOGRAPHIC MAP IMAGE COURTESY OF THE U.S. GEOLOGICAL SURVEY  
 QUADRANGLES INCLUDE: NEW HAVEN, WV (1/1/1994).

Project Manager: BYM  
 Drawn by: DAB  
 Checked by: MSF  
 Approved by: KME

Project No. N4155129  
 Scale: 1"=24,000 SF  
 File Name: Sitoloc2  
 Date: 9/29/15

**Terracon**  
 800 MORRISON ROAD  
 COLUMBUS, OHIO 43230

**SITE LOCATION MAP**  
 MOUNTAINEER PLANT IMPOUNDMENT CERTIFICATION  
 AMERICAN ELECTRIC POWER  
 MOUNTAINEER PLANT BOTTOM ASH POND COMPLEX

Exhibit  
 1-A



DIAGRAM IS FOR GENERAL LOCATION ONLY, AND IS NOT INTENDED FOR CONSTRUCTION PURPOSES

AERIAL PHOTOGRAPHY PROVIDED BY MICROSOFT BING MAPS

|                  |     |             |          |
|------------------|-----|-------------|----------|
| Project Manager: | BYM | Project No. | N4155129 |
| Drawn by:        | DAB | Scale:      | AS SHOWN |
| Checked by:      | MSF | File Name:  | Siteloc2 |
| Approved by:     | KME | Date:       | 9/29/15  |

**Terracon**  
 800 MORRISON ROAD  
 COLUMBUS, OHIO 43230

**SITE LOCATION MAP**

**MOUNTAINEER PLANT IMPOUNDMENT CERTIFICATION  
 AMERICAN ELECTRIC POWER  
 MOUNTAINEER PLANT BOTTOM ASH POND COMPLEX**

Exhibit

**1-B**







## **ATTACHMENT 1**

### **Pumped Influent and Water Balance Information**

**Mountaineer Plant Impoundment System  
 Pumped Influent**

| Influent Sources          | Rate (mgd)   | cfs       |
|---------------------------|--------------|-----------|
| <b>To Bottom Ash Pond</b> |              |           |
| Coal Pile Run-off         | 1.23         |           |
| Fly Ash Silo Sumps        | 3.12         |           |
| Stormwater                | 4.37         |           |
| Turbine Room Sump         | 1.84         |           |
| Pyrites Transport         | 1.28         |           |
| Bottom Ash Transport      | 3.12         |           |
| <b>Total</b>              | <b>14.96</b> | <b>24</b> |
| <b>To Wastewater Pond</b> |              |           |
| Water Treatment Sump      | 2.29         |           |
| Cooling Tower Blowdown    | 1.58         |           |
| <b>Total</b>              | <b>3.87</b>  | <b>6</b>  |
| <b>To Bottom Ash Pond</b> |              |           |
| Bioreactor                | 0.86         | <b>2</b>  |

Note:  
 Influent pumped is compiled from the attached water balance data provided by AEP.

# Appalachian Power Co. Mountaineer Plant

## Water Balance Flow Diagram

### NOTES

Note 1: All flows represent average water usage with the unit operating at full load.

Note 2: Maximum (max) flows include rainfall for a 10-year/24-hour storm event.


Note 3: Maximum (max) flow entering the Storm Water Pumping Station (SWPS) is the 24 hours of highest intensity in a 10 year/24-hour storm event.

Note 4: The design overflow of the SWPS to the River Water Make-up is anything over a 1" storm in a 24-hour period.

Note 5: Proposed storm water management modifications indicated in **GREEN**, and proposed storm water management terminations indicated in **RED**.

### LEGEND

- Supply Water
- Waste Water
- Reclaim Water
- Storm Water
- Evaporation/Rainfall
- No flow associated with normal operating conditions (emergency overflow)
- ### Outlet Number

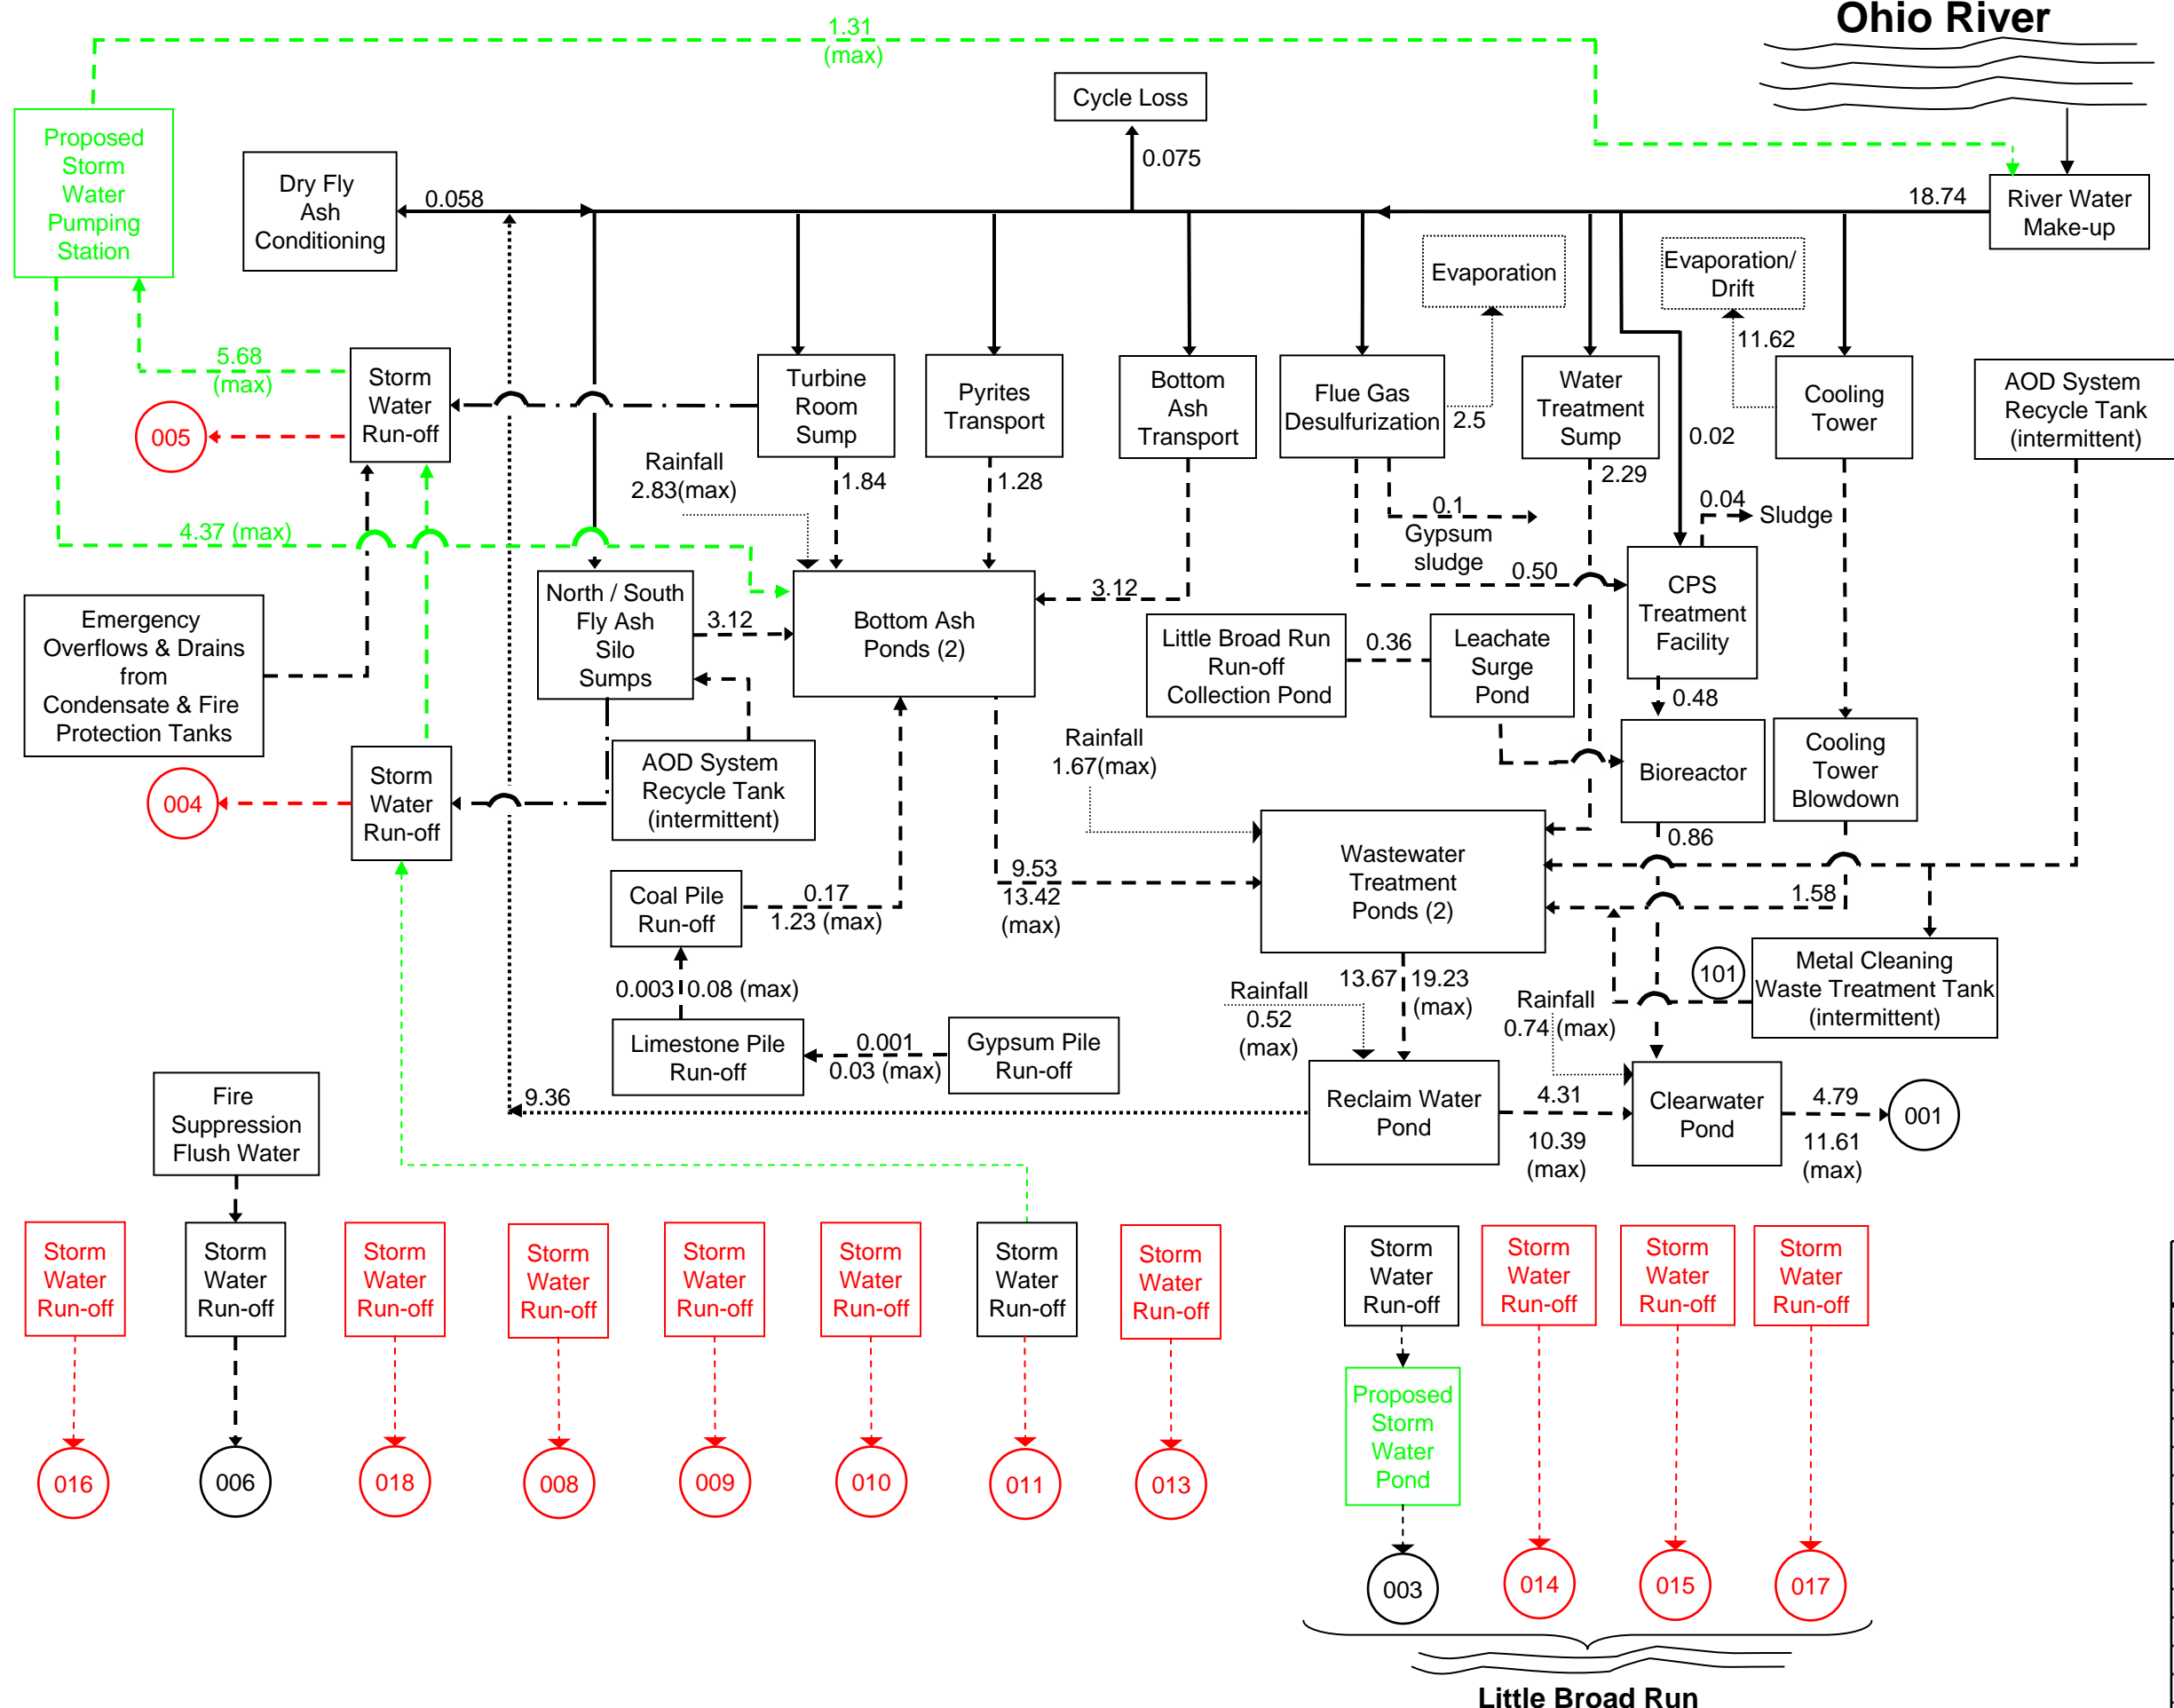

| Outlet Number | Receiving Water  | Average Discharge | Maximum Discharge |
|---------------|------------------|-------------------|-------------------|
| 001           | Ohio River       | 4.79              | 11.61             |
| 003           | Little Broad Run | 0.169             | 3.978             |
| 004           | Ohio River       | 0.110             | 2.605             |
| 005           | Ohio River       | 0.307             | 7.238             |
| 006           | Ohio River       | 0.019             | 0.458             |
| 008           | Ohio River       | 0.003             | 0.062             |
| 009           | Ohio River       | 0.006             | 0.134             |
| 010           | Ohio River       | 0.001             | 0.029             |
| 011           | Ohio River       | 0.009             | 0.216             |
| 013           | Ohio River       | 0.012             | 0.273             |
| 014           | Little Broad Run | 0.001             | 0.026             |
| 015           | Little Broad Run | 0.011             | 0.252             |
| 016           | Ohio River       | 0.004             | 0.098             |
| 017           | Little Broad Run | 0.002             | 0.064             |
| 018           | Ohio River       | 0.001             | 0.024             |

All flows measured in million gallons per day (MGD)

## **ATTACHMENT 2**

### Precipitation Data



**NOAA Atlas 14, Volume 2, Version 3**  
**Location name: Letart, West Virginia, US\***  
**Latitude: 38.9697°, Longitude: -81.9364°**  
**Elevation: 621 ft\***  
 \* source: Google Maps



**POINT PRECIPITATION FREQUENCY ESTIMATES**

G.M. Bonnin, D. Martin, B. Lin, T. Parzybok, M.Yekta, and D. Riley

NOAA, National Weather Service, Silver Spring, Maryland

[PF tabular](#) | [PF graphical](#) | [Maps & aeriels](#)

**PF tabular**

| <b>PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches)<sup>1</sup></b> |                                     |                        |                        |                        |                        |                        |                        |                        |                        |                        |
|--|-------------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Duration   | Average recurrence interval (years) |                        |                        |                        |                        |                        |                        |                        |                        |                        |
|  | 1                                   | 2                      | 5                      | 10                     | 25                     | 50                     | 100                    | 200                    | 500                    | 1000                   |
| 5-min  | 0.337<br>(0.305-0.371)              | 0.401<br>(0.364-0.442) | 0.481<br>(0.436-0.530) | 0.542<br>(0.491-0.597) | 0.619<br>(0.558-0.680) | 0.677<br>(0.610-0.742) | 0.732<br>(0.656-0.801) | 0.786<br>(0.703-0.859) | 0.857<br>(0.761-0.934) | 0.907<br>(0.803-0.988) |
| 10-min   | 0.523<br>(0.474-0.576)              | 0.625<br>(0.568-0.691) | 0.747<br>(0.678-0.824) | 0.837<br>(0.758-0.921) | 0.947<br>(0.854-1.04)  | 1.03<br>(0.924-1.13)   | 1.10<br>(0.988-1.21)   | 1.17<br>(1.05-1.28)    | 1.26<br>(1.12-1.37)    | 1.32<br>(1.17-1.44)    |
| 15-min   | 0.641<br>(0.581-0.706)              | 0.765<br>(0.694-0.845) | 0.917<br>(0.832-1.01)  | 1.03<br>(0.933-1.13)   | 1.17<br>(1.06-1.29)    | 1.27<br>(1.14-1.39)    | 1.37<br>(1.23-1.50)    | 1.46<br>(1.31-1.60)    | 1.57<br>(1.40-1.71)    | 1.65<br>(1.46-1.80)    |
| 30-min   | 0.848<br>(0.769-0.934)              | 1.02<br>(0.929-1.13)   | 1.26<br>(1.14-1.39)    | 1.43<br>(1.30-1.57)    | 1.65<br>(1.49-1.81)    | 1.82<br>(1.64-1.99)    | 1.98<br>(1.77-2.16)    | 2.13<br>(1.90-2.33)    | 2.33<br>(2.07-2.54)    | 2.48<br>(2.19-2.70)    |
| 60-min   | 1.04<br>(0.939-1.14)                | 1.26<br>(1.14-1.39)    | 1.58<br>(1.43-1.74)    | 1.82<br>(1.65-2.00)    | 2.14<br>(1.93-2.35)    | 2.39<br>(2.15-2.62)    | 2.64<br>(2.37-2.89)    | 2.89<br>(2.58-3.16)    | 3.22<br>(2.86-3.51)    | 3.48<br>(3.08-3.79)    |
| 2-hr   | 1.21<br>(1.10-1.33)                 | 1.46<br>(1.33-1.61)    | 1.84<br>(1.67-2.02)    | 2.13<br>(1.92-2.33)    | 2.52<br>(2.27-2.76)    | 2.84<br>(2.55-3.10)    | 3.16<br>(2.82-3.45)    | 3.50<br>(3.11-3.80)    | 3.95<br>(3.48-4.28)    | 4.31<br>(3.78-4.66)    |
| 3-hr   | 1.28<br>(1.16-1.41)                 | 1.54<br>(1.40-1.70)    | 1.93<br>(1.76-2.13)    | 2.24<br>(2.03-2.47)    | 2.66<br>(2.41-2.92)    | 3.00<br>(2.70-3.29)    | 3.36<br>(3.01-3.67)    | 3.72<br>(3.31-4.06)    | 4.23<br>(3.73-4.60)    | 4.62<br>(4.06-5.02)    |
| 6-hr   | 1.52<br>(1.39-1.67)                 | 1.82<br>(1.67-2.01)    | 2.26<br>(2.07-2.49)    | 2.62<br>(2.39-2.87)    | 3.12<br>(2.83-3.41)    | 3.54<br>(3.19-3.85)    | 3.96<br>(3.56-4.31)    | 4.41<br>(3.94-4.78)    | 5.04<br>(4.45-5.44)    | 5.54<br>(4.86-5.97)    |
| 12-hr  | 1.79<br>(1.65-1.94)                 | 2.13<br>(1.96-2.32)    | 2.61<br>(2.41-2.85)    | 3.02<br>(2.78-3.28)    | 3.59<br>(3.29-3.88)    | 4.06<br>(3.70-4.38)    | 4.56<br>(4.13-4.90)    | 5.08<br>(4.58-5.45)    | 5.82<br>(5.19-6.23)    | 6.42<br>(5.68-6.85)    |
| 24-hr  | 2.14<br>(2.01-2.28)                 | 2.55<br>(2.40-2.72)    | 3.09<br>(2.90-3.29)    | 3.53<br>(3.31-3.76)    | 4.14<br>(3.88-4.40)    | 4.64<br>(4.33-4.92)    | 5.15<br>(4.79-5.46)    | 5.68<br>(5.27-6.01)    | 6.41<br>(5.92-6.77)    | 6.98<br>(6.42-7.37)    |
| 2-day  | 2.55<br>(2.40-2.71)                 | 3.02<br>(2.85-3.22)    | 3.63<br>(3.41-3.86)    | 4.11<br>(3.87-4.37)    | 4.78<br>(4.48-5.07)    | 5.31<br>(4.96-5.63)    | 5.85<br>(5.45-6.20)    | 6.40<br>(5.95-6.78)    | 7.16<br>(6.61-7.58)    | 7.74<br>(7.12-8.19)    |
| 3-day  | 2.74<br>(2.58-2.90)                 | 3.24<br>(3.06-3.45)    | 3.87<br>(3.65-4.11)    | 4.37<br>(4.12-4.64)    | 5.05<br>(4.75-5.35)    | 5.59<br>(5.24-5.92)    | 6.13<br>(5.73-6.48)    | 6.68<br>(6.23-7.07)    | 7.42<br>(6.88-7.84)    | 7.98<br>(7.37-8.43)    |
| 4-day  | 2.93<br>(2.77-3.10)                 | 3.46<br>(3.27-3.67)    | 4.12<br>(3.89-4.37)    | 4.64<br>(4.38-4.91)    | 5.33<br>(5.02-5.64)    | 5.87<br>(5.51-6.21)    | 6.41<br>(6.01-6.77)    | 6.96<br>(6.50-7.35)    | 7.67<br>(7.14-8.10)    | 8.22<br>(7.63-8.67)    |
| 7-day  | 3.52<br>(3.33-3.72)                 | 4.16<br>(3.94-4.40)    | 4.90<br>(4.63-5.17)    | 5.46<br>(5.16-5.76)    | 6.20<br>(5.85-6.54)    | 6.76<br>(6.37-7.13)    | 7.32<br>(6.88-7.71)    | 7.86<br>(7.37-8.27)    | 8.56<br>(8.00-9.01)    | 9.08<br>(8.46-9.57)    |
| 10-day   | 4.03<br>(3.82-4.25)                 | 4.75<br>(4.50-5.01)    | 5.53<br>(5.24-5.83)    | 6.12<br>(5.80-6.45)    | 6.89<br>(6.51-7.25)    | 7.47<br>(7.05-7.85)    | 8.02<br>(7.56-8.44)    | 8.56<br>(8.05-9.00)    | 9.24<br>(8.67-9.72)    | 9.73<br>(9.11-10.2)    |
| 20-day   | 5.62<br>(5.34-5.91)                 | 6.59<br>(6.26-6.92)    | 7.56<br>(7.18-7.94)    | 8.28<br>(7.87-8.69)    | 9.20<br>(8.73-9.65)    | 9.87<br>(9.37-10.4)    | 10.5<br>(9.96-11.0)    | 11.1<br>(10.5-11.6)    | 11.8<br>(11.2-12.4)    | 12.4<br>(11.7-13.0)    |
| 30-day   | 6.94<br>(6.64-7.26)                 | 8.11<br>(7.76-8.49)    | 9.20<br>(8.80-9.63)    | 10.0<br>(9.57-10.5)    | 11.0<br>(10.5-11.5)    | 11.8<br>(11.2-12.3)    | 12.4<br>(11.9-13.0)    | 13.1<br>(12.4-13.7)    | 13.8<br>(13.1-14.5)    | 14.4<br>(13.6-15.0)    |
| 45-day   | 8.87<br>(8.50-9.26)                 | 10.3<br>(9.89-10.8)    | 11.6<br>(11.1-12.1)    | 12.5<br>(12.0-13.1)    | 13.6<br>(13.1-14.2)    | 14.4<br>(13.8-15.1)    | 15.2<br>(14.5-15.9)    | 15.9<br>(15.1-16.6)    | 16.6<br>(15.9-17.4)    | 17.2<br>(16.4-18.0)    |
| 60-day   | 10.5<br>(10.1-11.0)                 | 12.2<br>(11.7-12.7)    | 13.6<br>(13.1-14.2)    | 14.6<br>(14.0-15.2)    | 15.8<br>(15.2-16.5)    | 16.7<br>(16.0-17.4)    | 17.5<br>(16.7-18.2)    | 18.1<br>(17.4-18.9)    | 18.9<br>(18.1-19.7)    | 19.5<br>(18.6-20.3)    |

<sup>1</sup> Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS). Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.


[Back to Top](#)

**PF graphical**

## **ATTACHMENT 3**

PondPack Model Output

# Scenario: Post-Development 1000 Year

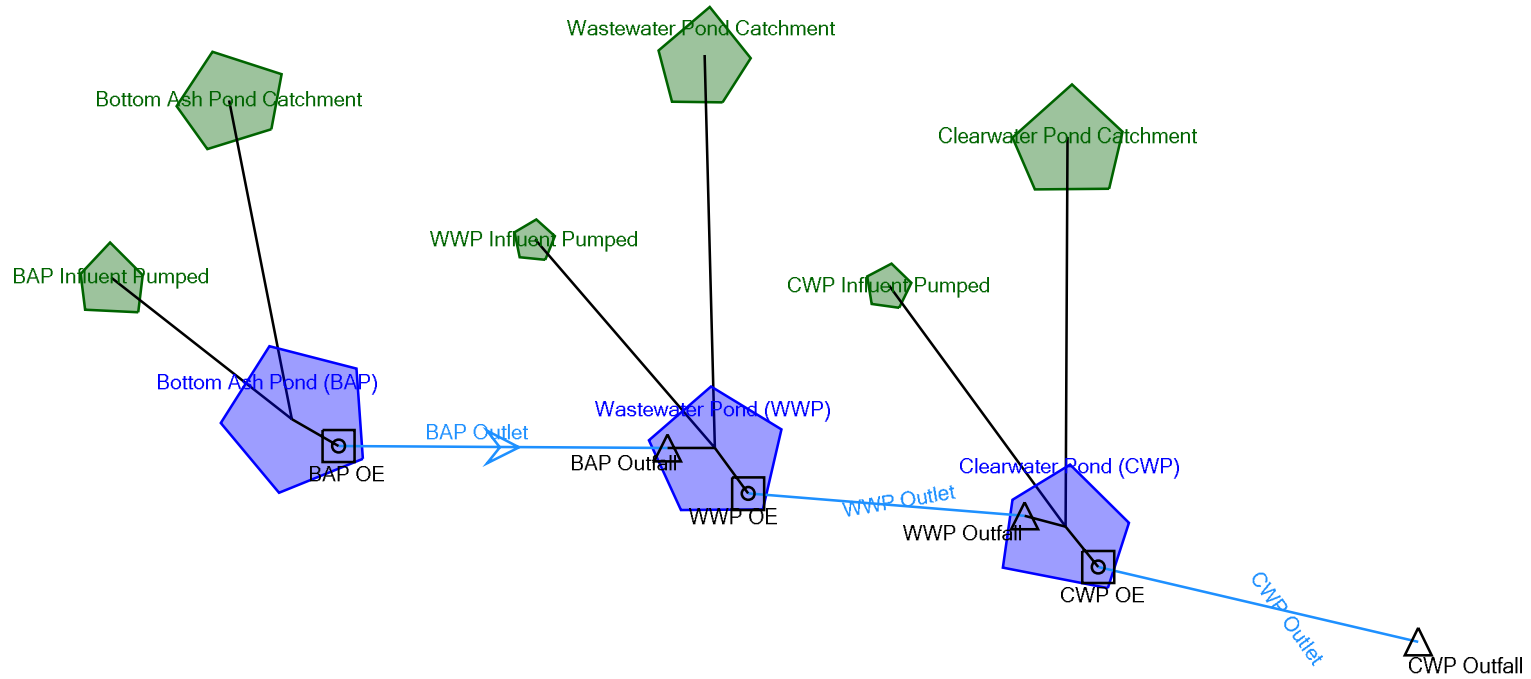



## Table of Contents

|                           |  |    |
|---------------------------|--|----|
|                           | Master Network Summary                   | 1  |
| BAP Influent Pumped       |  |    |
|                           | Read Hydrograph, 1,000 years             | 2  |
| Bottom Ash Pond Catchment |  |    |
|                           | Unit Hydrograph Summary, 1,000 years     | 4  |
| Clearwater Pond Catchment |  |    |
|                           | Unit Hydrograph Summary, 1,000 years     | 6  |
| CWP Influent Pumped       |  |    |
|                           | Read Hydrograph, 1,000 years             | 8  |
| Wastewater Pond Catchment |  |    |
|                           | Unit Hydrograph Summary, 1,000 years     | 10 |
| WWP Influent Pumped       |  |    |
|                           | Read Hydrograph, 1,000 years             | 12 |
| Bottom Ash Pond (BAP)     |  |    |
|                           | Elevation-Area Volume Curve, 1,000 years | 14 |
| Clearwater Pond (CWP)     |  |    |
|                           | Elevation-Area Volume Curve, 1,000 years | 15 |
| Wastewater Pond (WWP)     |  |    |
|                           | Elevation-Area Volume Curve, 1,000 years | 16 |
| Bottom Ash Pond Outlet    |  |    |
|                           | Outlet Input Data, 1,000 years           | 17 |
| Clearwater Pond Outlet    |  |    |
|                           | Outlet Input Data, 1,000 years           | 20 |
| Wastewater Pond Outlet    |  |    |
|                           | Outlet Input Data, 1,000 years           | 24 |

Subsection: Master Network Summary

**Catchments Summary**

| Label                     | Scenario                   | Return Event (years) | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft <sup>3</sup> /s) |
|---------------------------|----------------------------|----------------------|---------------------------|----------------------|--------------------------------|
| BAP Influent Pumped       | Post-Development 1000 Year | 1,000                | 47.603                    | 0.000                | 24.00                          |
| Bottom Ash Pond Catchment | Post-Development 1000 Year | 1,000                | 9.300                     | 11.900               | 143.80                         |
| CWP Influent Pumped       | Post-Development 1000 Year | 1,000                | 3.967                     | 0.000                | 2.00                           |
| Clearwater Pond Catchment | Post-Development 1000 Year | 1,000                | 5.230                     | 11.950               | 76.86                          |
| WWP Influent Pumped       | Post-Development 1000 Year | 1,000                | 11.901                    | 0.000                | 6.00                           |
| Wastewater Pond Catchment | Post-Development 1000 Year | 1,000                | 6.102                     | 11.950               | 89.67                          |

**Node Summary**

| Label       | Scenario                   | Return Event (years) | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft <sup>3</sup> /s) |
|-------------|----------------------------|----------------------|---------------------------|----------------------|--------------------------------|
| CWP Outfall | Post-Development 1000 Year | 1,000                | 73.655                    | 12.350               | 77.07                          |

**Pond Summary**

| Label                       | Scenario                   | Return Event (years) | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft <sup>3</sup> /s) | Maximum Water Surface Elevation (ft) | Maximum Pond Storage (ac-ft) |
|-----------------------------|----------------------------|----------------------|---------------------------|----------------------|--------------------------------|--------------------------------------|------------------------------|
| Bottom Ash Pond (BAP) (IN)  | Post-Development 1000 Year | 1,000                | 56.903                    | 11.900               | 167.80                         | (N/A)                                | (N/A)                        |
| Bottom Ash Pond (BAP) (OUT) | Post-Development 1000 Year | 1,000                | 50.508                    | 12.400               | 37.74                          | 613.25                               | 16.505                       |
| Clearwater Pond (CWP) (IN)  | Post-Development 1000 Year | 1,000                | 74.860                    | 11.950               | 168.12                         | (N/A)                                | (N/A)                        |
| Clearwater Pond (CWP) (OUT) | Post-Development 1000 Year | 1,000                | 73.655                    | 12.350               | 77.07                          | 603.55                               | 3.877                        |
| Wastewater Pond (WWP) (IN)  | Post-Development 1000 Year | 1,000                | 68.511                    | 11.950               | 129.67                         | (N/A)                                | (N/A)                        |
| Wastewater Pond (WWP) (OUT) | Post-Development 1000 Year | 1,000                | 65.663                    | 12.050               | 100.24                         | 609.29                               | 3.775                        |

Subsection: Read Hydrograph  
 Label: BAP Influent Pumped

Return Event: 1,000 years  
 Storm Event: 1000 Year

|                   |                          |
|-------------------|--------------------------|
| Peak Discharge    | 24.00 ft <sup>3</sup> /s |
| Time to Peak      | 7.900 hours              |
| Hydrograph Volume | 47.603 ac-ft             |

**HYDROGRAPH ORDINATES (ft<sup>3</sup>/s)**  
**Output Time Increment = 0.100 hours**  
**Time on left represents time for first value in each row.**

| Time (hours) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) |
|--------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 0.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 0.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 1.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 1.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 2.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 2.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 3.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 3.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 4.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 4.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 5.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 5.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 6.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 6.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 7.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 7.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 8.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 8.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 9.000        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 9.500        | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 10.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 10.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 11.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 11.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 12.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 12.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 13.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 13.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 14.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 14.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 15.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 15.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 16.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 16.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 17.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 17.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 18.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 18.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 19.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |

Subsection: Read Hydrograph  
 Label: BAP Influent Pumped

Return Event: 1,000 years  
 Storm Event: 1000 Year

**HYDROGRAPH ORDINATES (ft<sup>3</sup>/s)**  
**Output Time Increment = 0.100 hours**  
**Time on left represents time for first value in each row.**

| Time (hours) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) |
|--------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 19.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 20.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 20.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 21.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 21.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 22.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 22.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 23.000       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 23.500       | 24.00                     | 24.00                     | 24.00                     | 24.00                     | 24.00                     |
| 24.000       | 24.00                     | (N/A)                     | (N/A)                     | (N/A)                     | (N/A)                     |

Subsection: Unit Hydrograph Summary  
 Label: Bottom Ash Pond Catchment

Return Event: 1,000 years  
 Storm Event: 1000 Year

|                                      |              |
|--------------------------------------|--------------|
| Storm Event                          | 1000 Year    |
| Return Event                         | 1,000 years  |
| Duration                             | 24.000 hours |
| Depth                                | 7.0 in       |
| Time of Concentration<br>(Composite) | 0.083 hours  |
| Area (User Defined)                  | 16.000 acres |

|  |                           |
|--|---------------------------|
| Computational Time<br>Increment            | 0.011 hours               |
| Time to Peak (Computed)                    | 11.911 hours              |
| Flow (Peak, Computed)                      | 146.03 ft <sup>3</sup> /s |
| Output Increment                           | 0.050 hours               |
| Time to Flow (Peak<br>Interpolated Output) | 11.900 hours              |
| Flow (Peak Interpolated<br>Output)         | 143.80 ft <sup>3</sup> /s |

|   |              |
|---|--------------|
| Drainage Area                               |              |
| SCS CN (Composite)                          | 100.000      |
| Area (User Defined)                         | 16.000 acres |
| Maximum Retention<br>(Pervious)             | 0.0 in       |
| Maximum Retention<br>(Pervious, 20 percent) | 0.0 in       |

|                                       |             |
|---------------------------------------|-------------|
| Cumulative Runoff                     |             |
| Cumulative Runoff Depth<br>(Pervious) | 7.0 in      |
| Runoff Volume (Pervious)              | 9.307 ac-ft |

|   |             |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) |             |
| Volume  | 9.300 ac-ft |

|                                      |                           |
|--------------------------------------|---------------------------|
| SCS Unit Hydrograph Parameters       |                           |
| Time of Concentration<br>(Composite) | 0.083 hours               |
| Computational Time<br>Increment      | 0.011 hours               |
| Unit Hydrograph Shape<br>Factor      | 483.432                   |
| K Factor                             | 0.749                     |
| Receding/Rising, Tr/Tp               | 1.670                     |
| Unit peak, qp                        | 217.54 ft <sup>3</sup> /s |
| Unit peak time, Tp                   | 0.056 hours               |

Subsection: Unit Hydrograph Summary  
Label: Bottom Ash Pond Catchment

Return Event: 1,000 years  
Storm Event: 1000 Year

---

| SCS Unit Hydrograph Parameters |             |
|--------------------------------|-------------|
| Unit receding limb, Tr         | 0.222 hours |
| Total unit time, Tb            | 0.278 hours |

---

Subsection: Unit Hydrograph Summary  
 Label: Clearwater Pond Catchment

Return Event: 1,000 years  
 Storm Event: 1000 Year

|                                      |              |
|--------------------------------------|--------------|
| Storm Event                          | 1000 Year    |
| Return Event                         | 1,000 years  |
| Duration                             | 24.000 hours |
| Depth                                | 7.0 in       |
| Time of Concentration<br>(Composite) | 0.100 hours  |
| Area (User Defined)                  | 9.000 acres  |

|  |                          |
|--|--------------------------|
| Computational Time<br>Increment            | 0.013 hours              |
| Time to Peak (Computed)                    | 11.920 hours             |
| Flow (Peak, Computed)                      | 79.77 ft <sup>3</sup> /s |
| Output Increment                           | 0.050 hours              |
| Time to Flow (Peak<br>Interpolated Output) | 11.950 hours             |
| Flow (Peak Interpolated<br>Output)         | 76.86 ft <sup>3</sup> /s |

|   |             |
|---|-------------|
| Drainage Area                               |             |
| SCS CN (Composite)                          | 100.000     |
| Area (User Defined)                         | 9.000 acres |
| Maximum Retention<br>(Pervious)             | 0.0 in      |
| Maximum Retention<br>(Pervious, 20 percent) | 0.0 in      |

|                                       |             |
|---------------------------------------|-------------|
| Cumulative Runoff                     |             |
| Cumulative Runoff Depth<br>(Pervious) | 7.0 in      |
| Runoff Volume (Pervious)              | 5.235 ac-ft |

|   |             |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) |             |
| Volume  | 5.230 ac-ft |

|                                      |                           |
|--------------------------------------|---------------------------|
| SCS Unit Hydrograph Parameters       |                           |
| Time of Concentration<br>(Composite) | 0.100 hours               |
| Computational Time<br>Increment      | 0.013 hours               |
| Unit Hydrograph Shape<br>Factor      | 483.432                   |
| K Factor                             | 0.749                     |
| Receding/Rising, Tr/Tp               | 1.670                     |
| Unit peak, qp                        | 101.97 ft <sup>3</sup> /s |
| Unit peak time, Tp                   | 0.067 hours               |

Subsection: Unit Hydrograph Summary  
Label: Clearwater Pond Catchment

Return Event: 1,000 years  
Storm Event: 1000 Year

---

SCS Unit Hydrograph Parameters

---

|                        |             |
|------------------------|-------------|
| Unit receding limb, Tr | 0.267 hours |
| Total unit time, Tb    | 0.333 hours |

---



Subsection: Read Hydrograph  
 Label: CWP Influent Pumped

Return Event: 1,000 years  
 Storm Event: 1000 Year

|                   |                         |
|-------------------|-------------------------|
| Peak Discharge    | 2.00 ft <sup>3</sup> /s |
| Time to Peak      | 7.900 hours             |
| Hydrograph Volume | 3.967 ac-ft             |

**HYDROGRAPH ORDINATES (ft<sup>3</sup>/s)**  
**Output Time Increment = 0.100 hours**  
**Time on left represents time for first value in each row.**

| Time (hours) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) |
|--------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 0.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 0.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 1.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 1.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 2.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 2.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 3.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 3.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 4.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 4.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 5.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 5.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 6.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 6.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 7.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 7.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 8.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 8.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 9.000        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 9.500        | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 10.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 10.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 11.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 11.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 12.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 12.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 13.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 13.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 14.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 14.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 15.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 15.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 16.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 16.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 17.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 17.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 18.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 18.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 19.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |

Subsection: Read Hydrograph  
 Label: CWP Influent Pumped

Return Event: 1,000 years  
 Storm Event: 1000 Year

**HYDROGRAPH ORDINATES (ft<sup>3</sup>/s)**  
**Output Time Increment = 0.100 hours**  
**Time on left represents time for first value in each row.**

| Time (hours) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) |
|--------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 19.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 20.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 20.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 21.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 21.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 22.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 22.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 23.000       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 23.500       | 2.00                      | 2.00                      | 2.00                      | 2.00                      | 2.00                      |
| 24.000       | 2.00                      | (N/A)                     | (N/A)                     | (N/A)                     | (N/A)                     |

Subsection: Unit Hydrograph Summary  
 Label: Wastewater Pond Catchment

Return Event: 1,000 years  
 Storm Event: 1000 Year

|                                      |              |
|--------------------------------------|--------------|
| Storm Event                          | 1000 Year    |
| Return Event                         | 1,000 years  |
| Duration                             | 24.000 hours |
| Depth                                | 7.0 in       |
| Time of Concentration<br>(Composite) | 0.100 hours  |
| Area (User Defined)                  | 10.500 acres |

|  |                          |
|--|--------------------------|
| Computational Time<br>Increment            | 0.013 hours              |
| Time to Peak (Computed)                    | 11.920 hours             |
| Flow (Peak, Computed)                      | 93.07 ft <sup>3</sup> /s |
| Output Increment                           | 0.050 hours              |
| Time to Flow (Peak<br>Interpolated Output) | 11.950 hours             |
| Flow (Peak Interpolated<br>Output)         | 89.67 ft <sup>3</sup> /s |

|   |              |
|---|--------------|
| Drainage Area                               |              |
| SCS CN (Composite)                          | 100.000      |
| Area (User Defined)                         | 10.500 acres |
| Maximum Retention<br>(Pervious)             | 0.0 in       |
| Maximum Retention<br>(Pervious, 20 percent) | 0.0 in       |

|                                       |             |
|---------------------------------------|-------------|
| Cumulative Runoff                     |             |
| Cumulative Runoff Depth<br>(Pervious) | 7.0 in      |
| Runoff Volume (Pervious)              | 6.108 ac-ft |

|   |             |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) |             |
| Volume  | 6.102 ac-ft |

|                                      |                           |
|--------------------------------------|---------------------------|
| SCS Unit Hydrograph Parameters       |                           |
| Time of Concentration<br>(Composite) | 0.100 hours               |
| Computational Time<br>Increment      | 0.013 hours               |
| Unit Hydrograph Shape<br>Factor      | 483.432                   |
| K Factor                             | 0.749                     |
| Receding/Rising, Tr/Tp               | 1.670                     |
| Unit peak, qp                        | 118.97 ft <sup>3</sup> /s |
| Unit peak time, Tp                   | 0.067 hours               |

Subsection: Unit Hydrograph Summary  
Label: Wastewater Pond Catchment

Return Event: 1,000 years  
Storm Event: 1000 Year

---

| SCS Unit Hydrograph Parameters |             |
|--------------------------------|-------------|
| Unit receding limb, Tr         | 0.267 hours |
| Total unit time, Tb            | 0.333 hours |

---

Subsection: Read Hydrograph  
 Label: WWP Influent Pumped

Return Event: 1,000 years  
 Storm Event: 1000 Year

|                   |                         |
|-------------------|-------------------------|
| Peak Discharge    | 6.00 ft <sup>3</sup> /s |
| Time to Peak      | 7.900 hours             |
| Hydrograph Volume | 11.901 ac-ft            |

**HYDROGRAPH ORDINATES (ft<sup>3</sup>/s)**  
**Output Time Increment = 0.100 hours**  
**Time on left represents time for first value in each row.**

| Time (hours) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) |
|--------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 0.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 0.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 1.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 1.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 2.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 2.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 3.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 3.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 4.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 4.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 5.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 5.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 6.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 6.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 7.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 7.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 8.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 8.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 9.000        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 9.500        | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 10.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 10.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 11.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 11.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 12.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 12.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 13.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 13.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 14.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 14.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 15.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 15.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 16.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 16.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 17.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 17.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 18.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 18.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 19.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |

Subsection: Read Hydrograph  
 Label: WWP Influent Pumped

Return Event: 1,000 years  
 Storm Event: 1000 Year

**HYDROGRAPH ORDINATES (ft<sup>3</sup>/s)**  
**Output Time Increment = 0.100 hours**  
**Time on left represents time for first value in each row.**

| Time (hours) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) | Flow (ft <sup>3</sup> /s) |
|--------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 19.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 20.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 20.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 21.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 21.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 22.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 22.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 23.000       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 23.500       | 6.00                      | 6.00                      | 6.00                      | 6.00                      | 6.00                      |
| 24.000       | 6.00                      | (N/A)                     | (N/A)                     | (N/A)                     | (N/A)                     |

Subsection: Elevation-Area Volume Curve  
 Label: Bottom Ash Pond (BAP)

Return Event: 1,000 years  
 Storm Event: 1000 Year

| Elevation<br>(ft) | Planimeter<br>(ft <sup>2</sup> ) | Area<br>(acres) | $A1+A2+\frac{\text{sqr}(A1*A2)}{2}$<br>(acres) | Volume<br>(ac-ft) | Volume (Total)<br>(ac-ft) |
|-------------------|----------------------------------|-----------------|--|-------------------|---------------------------|
| 612.00            | 0.0                              | 13.000          | 0.000  | 0.000             | 0.000                     |
| 613.00            | 0.0                              | 13.290          | 39.434   | 13.145            | 13.145                    |
| 614.00            | 0.0                              | 13.606          | 40.343   | 13.448            | 26.592                    |
| 616.00            | 0.0                              | 14.191          | 41.692   | 27.795            | 54.387                    |
| 618.00            | 0.0                              | 14.725          | 43.372   | 28.915            | 83.302                    |
| 620.00            | 0.0                              | 15.326          | 45.074   | 30.049            | 113.351                   |

Subsection: Elevation-Area Volume Curve  
 Label: Clearwater Pond (CWP)

Return Event: 1,000 years  
 Storm Event: 1000 Year

| Elevation<br>(ft) | Planimeter<br>(ft <sup>2</sup> ) | Area<br>(acres) | $A1+A2+\text{sqr}(A1*A2)$<br>(acres) | Volume<br>(ac-ft) | Volume (Total)<br>(ac-ft) |
|-------------------|----------------------------------|-----------------|--------------------------------------|-------------------|---------------------------|
| 603.00            | 0.0                              | 6.900           | 0.000                                | 0.000             | 0.000                     |
| 603.70            | 0.0                              | 7.159           | 21.087                               | 4.920             | 4.920                     |
| 604.00            | 0.0                              | 7.209           | 21.551                               | 2.155             | 7.075                     |
| 606.00            | 0.0                              | 7.571           | 22.167                               | 14.778            | 21.853                    |
| 608.00            | 0.0                              | 7.929           | 23.248                               | 15.498            | 37.352                    |
| 610.00            | 0.0                              | 8.299           | 24.340                               | 16.226            | 53.578                    |



Subsection: Elevation-Area Volume Curve  
 Label: Wastewater Pond (WWP)

Return Event: 1,000 years  
 Storm Event: 1000 Year

| Elevation<br>(ft) | Planimeter<br>(ft <sup>2</sup> ) | Area<br>(acres) | $A1+A2+\frac{\text{sqr}(A1*A2)}{2}$<br>(acres) | Volume<br>(ac-ft) | Volume (Total)<br>(ac-ft) |
|-------------------|----------------------------------|-----------------|--|-------------------|---------------------------|
| 608.70            | 0.0                              | 6.240           | 0.000  | 0.000             | 0.000                     |
| 610.00            | 0.0                              | 6.492           | 19.096   | 8.275             | 8.275                     |
| 612.00            | 0.0                              | 9.265           | 23.512   | 15.674            | 23.949                    |

Subsection: Outlet Input Data  
 Label: Bottom Ash Pond Outlet

Return Event: 1,000 years  
 Storm Event: 1000 Year

| Requested Pond Water Surface Elevations |           |
|---|-----------|
| Minimum (Headwater)                     | 612.00 ft |
| Increment (Headwater)                   | 0.10 ft   |
| Maximum (Headwater)                     | 620.00 ft |

**Outlet Connectivity**

| Structure Type     | Outlet ID   | Direction | Outfall     | E1 (ft) | E2 (ft) |
|--------------------|-------------|-----------|-------------|---------|---------|
| Inlet Box          | BAP Riser   | Forward   | BAP Culvert | 612.00  | 620.00  |
| Culvert-Circular   | BAP Culvert | Forward   | TW          | 606.67  | 620.00  |
| Tailwater Settings | Tailwater   |           |             | (N/A)   | (N/A)   |

Subsection: Outlet Input Data  
 Label: Bottom Ash Pond Outlet

Return Event: 1,000 years  
 Storm Event: 1000 Year

---

|                           |                             |
|---------------------------|-----------------------------|
| Structure ID: BAP Riser   |                             |
| Structure Type: Inlet Box |                             |
| Number of Openings        | 1                           |
| Elevation                 | 612.00 ft                   |
| Orifice Area              | 28.3 ft <sup>2</sup>        |
| Orifice Coefficient       | 0.600                       |
| Weir Length               | 9.00 ft                     |
| Weir Coefficient          | 3.00 (ft <sup>0.5</sup> )/s |
| K Reverse                 | 1.000                       |
| Manning's n               | 0.000                       |
| Key, Charged Riser        | 0.000                       |
| Weir Submergence          | False                       |
| Orifice H to crest        | False                       |

---



---

|                                  |             |
|----------------------------------|-------------|
| Structure ID: BAP Culvert        |             |
| Structure Type: Culvert-Circular |             |
| Number of Barrels                | 1           |
| Diameter                         | 48.0 in     |
| Length                           | 125.00 ft   |
| Length (Computed Barrel)         | 125.00 ft   |
| Slope (Computed)                 | 0.005 ft/ft |

---



---

|                       |         |
|-----------------------|---------|
| Outlet Control Data   |         |
| Manning's n           | 0.013   |
| Ke                    | 0.900   |
| Kb                    | 0.005   |
| Kr                    | 0.900   |
| Convergence Tolerance | 0.00 ft |

---



---

|                         |        |
|-------------------------|--------|
| Inlet Control Data      |        |
| Equation Form           | Form 1 |
| K                       | 0.0340 |
| M                       | 1.5000 |
| C                       | 0.0553 |
| Y                       | 0.5400 |
| T1 ratio (HW/D)         | 1.260  |
| T2 ratio (HW/D)         | 1.422  |
| Slope Correction Factor | -0.500 |

---

Subsection: Outlet Input Data  
Label: Bottom Ash Pond Outlet

Return Event: 1,000 years  
Storm Event: 1000 Year

---

Use unsubmerged inlet control 0 equation below T1 elevation.

Use submerged inlet control 0 equation above T2 elevation

In transition zone between unsubmerged and submerged inlet control, interpolate between flows at T1 & T2...

---

|              |           |         |                           |
|--------------|-----------|---------|---------------------------|
| T1 Elevation | 611.71 ft | T1 Flow | 87.96 ft <sup>3</sup> /s  |
| T2 Elevation | 612.36 ft | T2 Flow | 100.53 ft <sup>3</sup> /s |

---

Subsection: Outlet Input Data  
 Label: Clearwater Pond Outlet

Return Event: 1,000 years  
 Storm Event: 1000 Year

| Requested Pond Water Surface Elevations |           |
|---|-----------|
| Minimum (Headwater)                     | 603.00 ft |
| Increment (Headwater)                   | 0.10 ft   |
| Maximum (Headwater)                     | 610.00 ft |

**Outlet Connectivity**

| Structure Type     | Outlet ID   | Direction | Outfall     | E1 (ft) | E2 (ft) |
|--------------------|-------------|-----------|-------------|---------|---------|
| Inlet Box          | CWP Riser   | Forward   | CWP Culvert | 610.00  | 610.00  |
| Rectangular Weir   | CWP Weir    | Forward   | CWP Culvert | 603.00  | 610.00  |
| Culvert-Circular   | CWP Culvert | Forward   | TW          | 588.55  | 610.00  |
| Tailwater Settings | Tailwater   |           |             | (N/A)   | (N/A)   |

Subsection: Outlet Input Data  
Label: Clearwater Pond Outlet

Return Event: 1,000 years  
Storm Event: 1000 Year

---

|                           |                             |
|---------------------------|-----------------------------|
| Structure ID: CWP Riser   |                             |
| Structure Type: Inlet Box |                             |
| <hr/>                     |                             |
| Number of Openings        | 1                           |
| Elevation                 | 610.00 ft                   |
| Orifice Area              | 28.3 ft <sup>2</sup>        |
| Orifice Coefficient       | 0.600                       |
| Weir Length               | 16.00 ft                    |
| Weir Coefficient          | 3.00 (ft <sup>0.5</sup> )/s |
| K Reverse                 | 1.000                       |
| Manning's n               | 0.000                       |
| Key, Charged Riser        | 0.000                       |
| Weir Submergence          | False                       |
| Orifice H to crest        | False                       |

---

Subsection: Outlet Input Data  
 Label: Clearwater Pond Outlet

Return Event: 1,000 years  
 Storm Event: 1000 Year

|                                  |             |
|----------------------------------|-------------|
| Structure ID: CWP Culvert        |             |
| Structure Type: Culvert-Circular |             |
| Number of Barrels                | 1           |
| Diameter                         | 30.0 in     |
| Length                           | 140.00 ft   |
| Length (Computed Barrel)         | 140.00 ft   |
| Slope (Computed)                 | 0.004 ft/ft |
| Outlet Control Data              |             |
| Manning's n                      | 0.013       |
| Ke                               | 0.900       |
| Kb                               | 0.009       |
| Kr                               | 0.900       |
| Convergence Tolerance            | 0.00 ft     |
| Inlet Control Data               |             |
| Equation Form                    | Form 1      |
| K                                | 0.0340      |
| M                                | 1.5000      |
| C                                | 0.0553      |
| Y                                | 0.5400      |
| T1 ratio (HW/D)                  | 1.261       |
| T2 ratio (HW/D)                  | 1.423       |
| Slope Correction Factor          | -0.500      |

Use unsubmerged inlet control 0 equation below T1 elevation.  
 Use submerged inlet control 0 equation above T2 elevation

In transition zone between unsubmerged and submerged inlet control, interpolate between flows at T1 & T2...

|              |           |         |                          |
|--------------|-----------|---------|--------------------------|
| T1 Elevation | 591.70 ft | T1 Flow | 27.16 ft <sup>3</sup> /s |
| T2 Elevation | 592.11 ft | T2 Flow | 31.05 ft <sup>3</sup> /s |

Subsection: Outlet Input Data  
 Label: Clearwater Pond Outlet

Return Event: 1,000 years  
 Storm Event: 1000 Year

|                                      |                             |
|--------------------------------------|-----------------------------|
| Structure ID: CWP Weir               |                             |
| Structure Type: Rectangular Weir     |                             |
| Number of Openings                   | 1                           |
| Elevation                            | 603.00 ft                   |
| Weir Length                          | 180.00 ft                   |
| Weir Coefficient                     | 3.00 (ft <sup>0.5</sup> )/s |
| Structure ID: TW                     |                             |
| Structure Type: TW Setup, DS Channel |                             |
| Tailwater Type                       | Free Outfall                |
| Convergence Tolerances               |                             |
| Maximum Iterations                   | 30                          |
| Tailwater Tolerance (Minimum)        | 0.01 ft                     |
| Tailwater Tolerance (Maximum)        | 0.50 ft                     |
| Headwater Tolerance (Minimum)        | 0.01 ft                     |
| Headwater Tolerance (Maximum)        | 0.50 ft                     |
| Flow Tolerance (Minimum)             | 0.001 ft <sup>3</sup> /s    |
| Flow Tolerance (Maximum)             | 10.000 ft <sup>3</sup> /s   |



Subsection: Outlet Input Data  
 Label: Wastewater Pond Outlet

Return Event: 1,000 years  
 Storm Event: 1000 Year

| Requested Pond Water Surface Elevations |           |
|---|-----------|
| Minimum (Headwater)                     | 608.70 ft |
| Increment (Headwater)                   | 0.10 ft   |
| Maximum (Headwater)                     | 612.00 ft |

**Outlet Connectivity**

| Structure Type     | Outlet ID   | Direction         | Outfall     | E1 (ft) | E2 (ft) |
|--------------------|-------------|-------------------|-------------|---------|---------|
| Rectangular Weir   | WWP Weir    | Forward + Reverse | WWP Culvert | 609.00  | 612.00  |
| Culvert-Box        | WWP Culvert | Forward           | TW          | 603.00  | 612.00  |
| Tailwater Settings | Tailwater   |                   |             | (N/A)   | (N/A)   |

Subsection: Outlet Input Data  
 Label: Wastewater Pond Outlet

Return Event: 1,000 years  
 Storm Event: 1000 Year

|                             |             |
|-----------------------------|-------------|
| Structure ID: WWP Culvert   |             |
| Structure Type: Culvert-Box |             |
| Number of Barrels           | 1           |
| Width                       | 3.00 ft     |
| Height                      | 4.00 ft     |
| Length                      | 50.00 ft    |
| Length (Computed Barrel)    | 50.00 ft    |
| Slope (Computed)            | 0.000 ft/ft |
| Outlet Control Data         |             |
| Manning's n                 | 0.013       |
| Ke                          | 0.000       |
| Kb                          | 0.006       |
| Kr                          | 0.000       |
| Convergence Tolerance       | 0.00 ft     |
| Inlet Control Data          |             |
| Equation Form               | Form 2      |
| K                           | 0.5000      |
| M                           | 0.6670      |
| C                           | 0.0446      |
| Y                           | 0.6500      |
| T1 ratio (HW/D)             | 1.153       |
| T2 ratio (HW/D)             | 1.364       |
| Slope Correction Factor     | -0.500      |

Use unsubmerged inlet control 1 equation below T1 elevation.  
 Use submerged inlet control 1 equation above T2 elevation

In transition zone between unsubmerged and submerged inlet control, interpolate between flows at T1 & T2...

|              |           |         |                          |
|--------------|-----------|---------|--------------------------|
| T1 Elevation | 607.61 ft | T1 Flow | 84.00 ft <sup>3</sup> /s |
| T2 Elevation | 608.45 ft | T2 Flow | 96.00 ft <sup>3</sup> /s |

Subsection: Outlet Input Data  
Label: Wastewater Pond Outlet

Return Event: 1,000 years  
Storm Event: 1000 Year

---

|                                  |                             |
|----------------------------------|-----------------------------|
| Structure ID: WWP Weir           |                             |
| Structure Type: Rectangular Weir |                             |
| <hr/>                            |                             |
| Number of Openings               | 1                           |
| Elevation                        | 609.00 ft                   |
| Weir Length                      | 210.00 ft                   |
| Weir Coefficient                 | 3.00 (ft <sup>0.5</sup> )/s |

---

# Index

## B

- BAP Influent Pumped (Read Hydrograph, 1,000 years)...2, 3
- Bottom Ash Pond (BAP) (Elevation-Area Volume Curve, 1,000 years)...14
- Bottom Ash Pond Catchment (Unit Hydrograph Summary, 1,000 years)...4, 5
- Bottom Ash Pond Outlet (Outlet Input Data, 1,000 years)...17, 18, 19

## C

- Clearwater Pond (CWP) (Elevation-Area Volume Curve, 1,000 years)...15
- Clearwater Pond Catchment (Unit Hydrograph Summary, 1,000 years)...6, 7
- Clearwater Pond Outlet (Outlet Input Data, 1,000 years)...20, 21, 22, 23
- CWP Influent Pumped (Read Hydrograph, 1,000 years)...8, 9

## M

- Master Network Summary...1

## W

- Wastewater Pond (WWP) (Elevation-Area Volume Curve, 1,000 years)...16
- Wastewater Pond Catchment (Unit Hydrograph Summary, 1,000 years)...10, 11
- Wastewater Pond Outlet (Outlet Input Data, 1,000 years)...24, 25, 26
- WWP Influent Pumped (Read Hydrograph, 1,000 years)...12, 13